


FRESA DE TOPO RETO COM HASTE CILÍNDRICA EM METAL DURO - 2 CORTES

Revestimento: TISIN

Aplicação: Uso industrial para usinagem de alta dureza

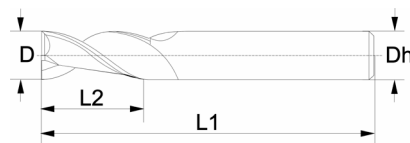

D	L1	L2	Dh
mm	mm	mm	mm
1,00	50	3	4
1,50	50	4	4
2,00	50	5	4
2,50	50	6	4
3,00	50	8	4


D	L1	L2	Dh
mm	mm	mm	mm
4,00	50	10	4
5,00	50	13	6
6,00	50	15	6
8,00	60	20	8
10,00	75	25	10

D	L1	L2	Dh
mm	mm	mm	mm
12,00	75	30	12
14,00	75	35	14
16,00	85	40	16
18,00	100	40	18
20,00	100	45	20

FRESA DE TOPO RETO COM HASTE CILÍNDRICA EM METAL DURO - 4 CORTES

Revestimento: TISIN

Aplicação: Uso industrial para usinagem de alta dureza

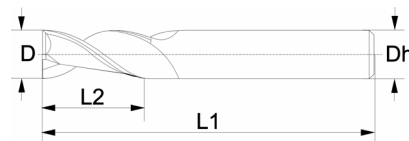

D	L1	L2	Dh
mm	mm	mm	mm
1,00	50	3	4
1,50	50	4	4
2,00	50	5	4
2,50	50	6	4
3,00	50	8	4

D	L1	L2	Dh
mm	mm	mm	mm
4,00	50	10	4
5,00	50	13	6
6,00	50	15	6
8,00	60	20	8
10,00	75	25	10

D	L1	L2	Dh
mm	mm	mm	mm
12,00	75	30	12
14,00	75	35	14
16,00	85	40	16
18,00	100	40	18
20,00	100	45	20