



MACHO MANUAL HSS


Macho manual perfil semi-seriado

UNC - Rosca Unificada Grossa

Acabamento: Brilhante

Disponíveis em jogos com: 02 pçs e 03 pçs

Aplicação: Uso industrial, usado para produzir rosas internas

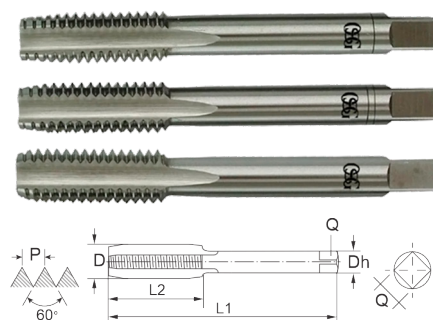


D	P	L1	L2	Ø Dh	Q	Ø Broca
mm	mm	mm	mm	mm	mm	mm
Nº5 (1/8)	40	40	11	3,5	2,7	2,6
Nº6	32	45	13	4,0	3,0	2,8
Nº8 (5/32)	32	45	13	4,5	3,4	3,4
Nº10 (3/16)	24	50	16	5,5	4,3	3,9
Nº12 (7/32)	24	50	17	6,0	4,9	4,5
1/4	20	56	19	6,0	4,9	5,1
5/16	18	63	22	6,0	4,9	6,6
3/8	16	70	22	7,0	5,5	8,0
7/16	14	75	24	8,0	6,2	9,4
1/2	13	80	29	9,0	7,0	10,8
9/16	12	80	30	11,0	9,0	12,2
5/8	11	90	32	12,0	9,0	13,6
3/4	10	105	40	14,0	11,0	16,5
7/8	9	110	40	18,0	14,5	19,5
1"	8	110	50	20,0	16,0	22,2
1.1/8	7	132	56	22,0	18,0	25,0
1.1/4	7	132	56	25,0	20,0	28,2

OSG

MACHO PARA MÁQUINA - HSSE - HASTE REFORÇADA

M - Rosca Métrica Grossa

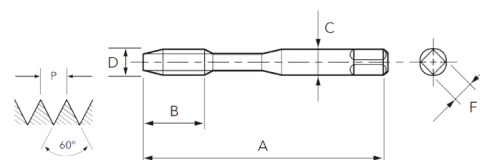

D	P	A	B	B	Ø C	F	Ø Broca
(mm)	(mm)	(mm)	POT	SFT	(mm)	(mm)	(mm)
M 3	0,50	56	11	5,0	3,5	2,7	2,5
M 4	0,70	63	13	7,0	2,8	2,1	3,3
M 5	0,80	70	16	8,0	3,5	2,7	4,2
M 6	1,00	80	19	10,0	4,5	3,4	5,0
M 8	1,25	90	22	13,0	6,0	4,9	6,8
M 10	1,50	100	24	15,0	7,0	5,5	8,5