


BROCA PARA CENTRAR EM AÇO RÁPIDO (M2)

Acabamento: Brilhante

Aplicação: Uso industrial para usinagem de aço com dureza até 50 HRC

HSS

DIN
333A

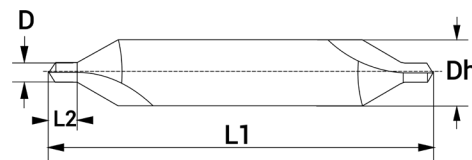

CBIT

D	Dh	L1	L2
mm	mm	mm	mm
1,00	3,2	31,5	1,3
1,60	4,0	35,5	2
2,00	5,0	40	2,5
2,50	6,3	45	3,1

D	Dh	L1	L2
mm	mm	mm	mm
3,15	8,0	50	3,9
4,00	10,0	56	5
5,00	12,5	63	6,3
6,30	16,0	71	8