

MACHO MANUAL HSS

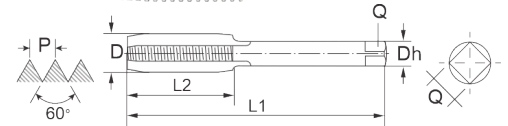
Macho manual em HSS, perfil semi-seriado

UNC - Rosca Unificada Grossa

Disponíveis em jogos com: 02 pçs e 03 pçs

Acabamento: Brilhante

Aplicação: Uso industrial, usado para produzir rosas internas

HSS**DIN 351****UNC**

D pol	P fpp	L1 mm	L2 mm	Ø Dh mm	Q mm	Ø Broca mm
Nº5 (1/8)	40	40	11	3,5	2,7	2,7
Nº6	32	45	13	4,0	3,0	2,8
Nº8 (5/32)	32	45	13	4,5	3,4	3,5
Nº10 (3/16)	24	50	16	5,5	4,3	3,8
Nº12 (7/32)	24	50	17	6,0	4,9	4,5
1/4	20	56	19	6,0	4,9	5,1
5/16	18	63	22	6,0	4,9	6,5
3/8	16	70	22	7,0	5,5	7,9
7/16	14	75	24	8,0	6,2	9,3
1/2	13	80	29	9,0	7,0	10,7
9/16	12	80	30	11,0	9,0	12,3
5/8	11	90	32	12,0	9,0	13,6
3/4	10	105	40	14,0	11,0	16,5
7/8	9	110	40	18,0	14,5	19,5
1"	8	110	50	20,0	16,0	22,3
1.1/8	7	132	56	22,0	18,0	25,0
1.1/4	7	132	56	25,0	20,0	28,2
1.3/8	6	150	63	28,0	22,0	30,8
1.1/2	6	150	63	32,0	24,0	34,0

MACHO MANUAL HSS

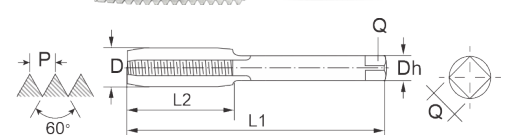
Macho manual em HSS, perfil semi-seriado

UNF - Rosca Unificada Fina

Disponível em jogo com: 02 pçs

Acabamento: Brilhante

Aplicação: Uso industrial, usado para produzir rosas internas

HSS**DIN 351****UNF**

D pol	P fpp	L1 mm	L2 mm	Ø Dh mm	Q mm	Ø Broca mm
Nº5 (1/8)	44	40	11	3,5	2,7	2,7
Nº6	40	45	13	4,0	3,0	3,0
Nº8 (5/32)	36	45	13	4,5	3,4	3,5
Nº10 (3/16)	32	50	16	5,5	4,3	4,1
1/4	28	56	19	6,0	4,9	5,5
5/16	24	63	22	6,0	4,9	6,9
3/8	24	70	22	7,0	5,5	8,5
7/16	20	70	22	8,0	6,2	9,9
1/2	20	70	22	9,0	7,0	11,5
9/16	18	70	22	11,0	9,0	12,9
5/8	18	70	22	12,0	9,0	14,6
3/4	16	80	22	14,0	11,0	17,5
7/8	14	80	22	18,0	14,5	20,5
1"	12	80	22	20,0	16,0	23,4
1.1/8	12	90	22	22,0	18,0	26,5
1.1/4	12	90	22	25,0	20,0	29,5
1.3/8	12	100	25	28,0	22,0	32,5
1.1/2	12	110	25	32,0	24,0	36,0